

S-FLS series
Non-Intrinsic Safety Signal
Surge Protective Devices

Č Test standards

IEC 61643-1/GB 18802.1; IEC 61643-21/GB/T 18802.21
IEC 62305-1~IEC 62305-5; IEC 61508-1~IEC 61508-7


Č Model description

Č Features

- › 7.4 mm Ultra-thin design, saving space;
- › Multiple protection circuit, strong resistance to surge;
- › Support terminal grounding (optional);
- › 35 mm rail installation;
- › A variety of models, applicable to all measurement.

Č Parameters

Č Wiring diagram

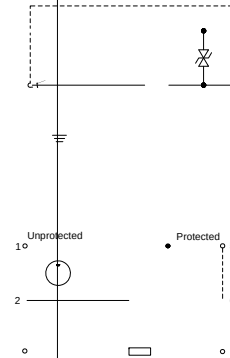

Nanjing New Power Electric Co., Ltd.

C Dimension

Width × Height × Length 7.4 mm × 95.2 mm × 70 mm

